
IE-500 Control Panel Reference Guide

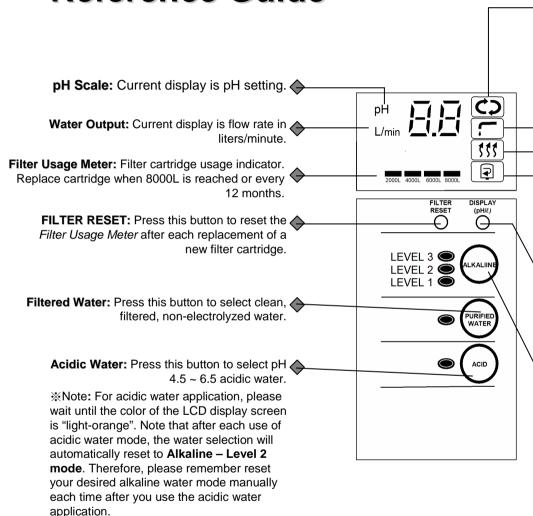

Manual Cleaning: Indicates it is time to do manual cleaning. Please turn on and run water through the system and press the "ACID" button. After 3~5 minutes turn off the water and the manual cleaning light will stop blinking. For best system performance it is recommended to do manual cleaning once every 2 week. Please DO NOT DRINK the water from the system during the cleaning process.

Water Flow Control: Indicates water entering system exceeds the recommended flow rate. Please turn the water flow down from your faucet. Once the appropriate flow rate is reached the blinking will stop.

Temperature Control: Indicates that water entering system is too hot. Please adjust the water from your faucet to room temperature and the blinking will stop. Wait until the system has cooled down before using the system again.

Filter Cartridge Replacement: Indicates it is the time to replace the filter cartridge. In order to maintain the best quality of alkaline water, the filter cartridge should be be replaced every 12 months or when this display blinks, which ever occurs first. Remember to press the Filter Reset button after changing the cartridge.

Screen Display Mode: Press this button to select the display mode on the screen as pH or L/min.

Alkaline Water: Press "ALKALINE" button to select the desired alkaline water output. The light indicates the current selection of water output^{1&2}:

Alkaline- LEVEL3: pH 9.3 ~ 9.5 Alkaline- LEVEL2: pH 9.0 ~ 9.3 Alkaline- LEVEL1: pH 8.5 ~ 9.0

※For drinking alkaline water, please wait until the color of the LCD display screen is "blue".

- •Note 1: All pH levels are approximate, \pm 0.25 depending on local water supply.
- ●Note 2: Water with pH <7.0 or >9.25 is not recommended for drinking.